


Flush Mount Compact Door

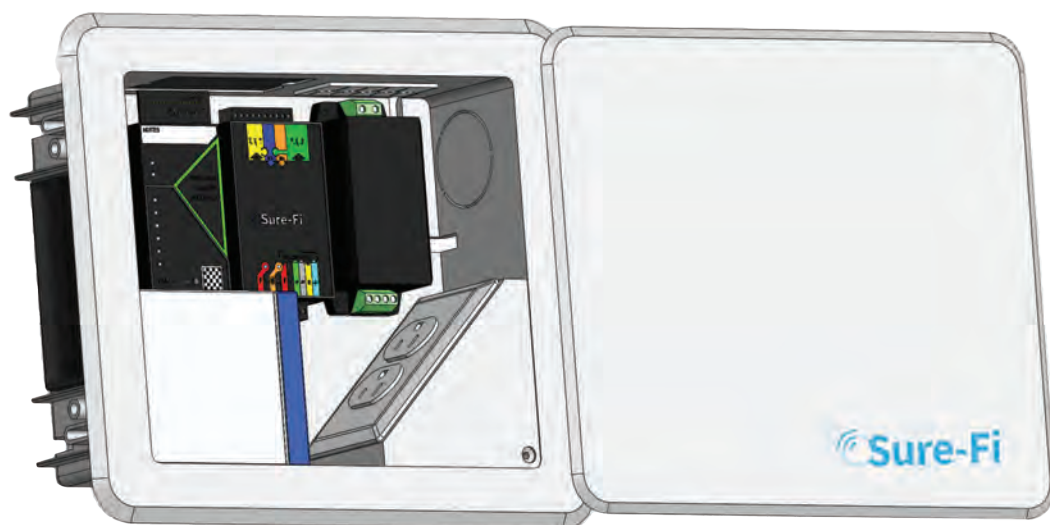

- Complete power and door control solution
- Includes one Sure-Fi DS004 Wiegand Bridge systems
- Connect to any local power, 85-305VAC range
- 12VDC 5.0A power supply
- 12VDC battery chargers/UPS (batteries not included)
- Wire block for quick connection to 12VDC

Sure-Fi Wiegand Wireless Bridge


Works with any Wiegand protocol up to 64 bits

1 Wiegand inputs


2 relay Outputs (Wet or Dry)
Request to exit input (REX)



Side View

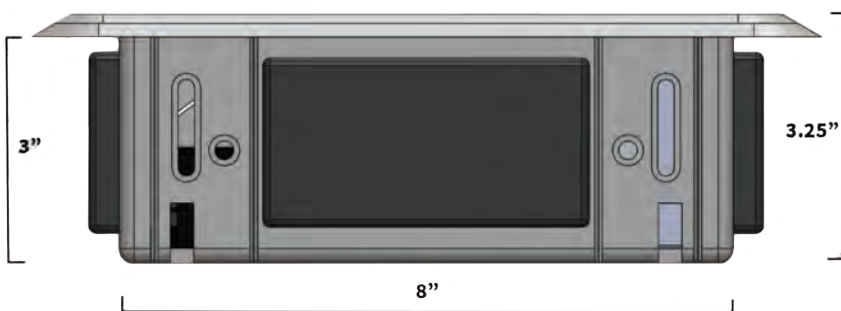

Top View

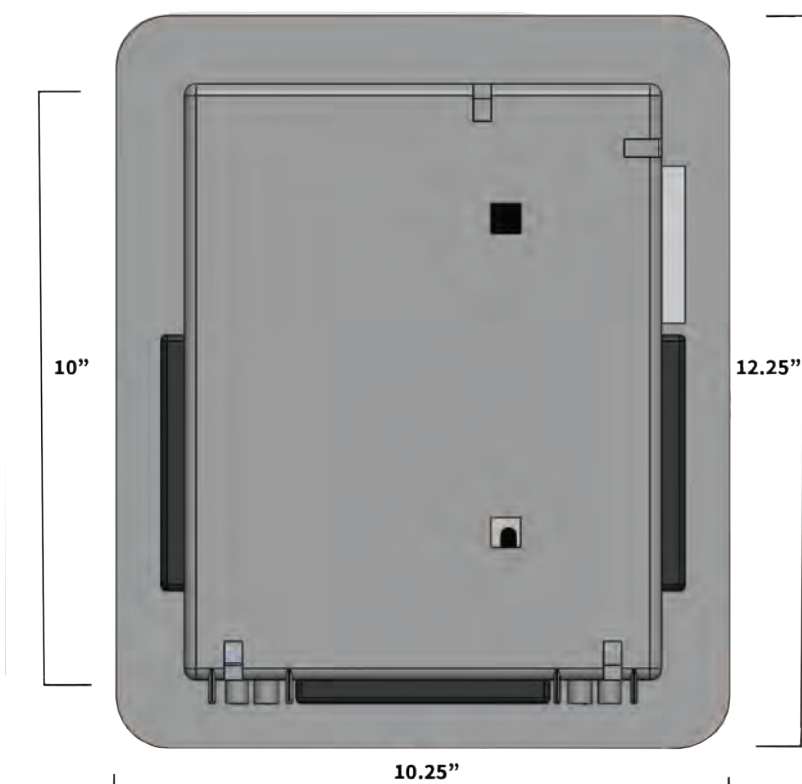

SPECIFICATIONS

Enclosure (main box)

- 10" x 8" x 3"
- UL-50 / cUL Listed enclosure
- NEMA Type 3, 3R, 35, 4, 4X, 6/6P, 12 & Marine Use IP68 enclosure
- Enclosure (to lid)
12.25" x 10.25" x 3.25"

Power

- 12Vdc 5.0A power supply
- Input Voltage 85~305Vac
- Max Power 60 Watts
- 12VDC / 24VDC battery chargers / UPS (batteries not included)